FLYING TIGER

INSTRUCTIONS

DOOYONG IND.CO., LTD.

FLYING TIGER

Technical information

(1) Required Power Capacity

+5V 4A or more

+12V 1A or more

(2) Output

R−analog, positive

G−analog, positive

B−analog, positive

SYNC−H−V complexed, negative

Play Instruction

- SHOOT 1 MACHINE GUN
- SHOOT 2 FIRE BOMB

Available one more FIRE BOMB

Power Up

Gun Change RED 3-Way Gun

Gun Change GREEN Vulcan Gun

1 UP Bonus

WIRING DIAGRAM

SOLDER SIDE			COMPONENT SIDE
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
−5V	E	5	−5V
+12V	F	6	+12V
	H	7	
COIN COUNTER 2	J	8	COIN COUNTER 1
	K	9	
SP (−)	L	10	SP (+)
	M	11	
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	P	13	VIDEO BLUE
SERVICE SW	R	14	VIDEO GND
	S	15	
COIN SW 2	T	16	COIN SW 1
START SW 2	U	17	START SW 1
2P UP	V	18	1P UP
2P DOWN	W	19	1P DOWN
2P LEFT	X	20	1P LEFT
2P RIGHT	Y	21	1P RIGHT
2P SHOOT 1	Z	22	1P SHOOT 1
2P SHOOT 2	a	23	1P SHOOT 2
	b	24	
	c	25	
	d	26	
GND	e	27	GND
GND	f	28	GND

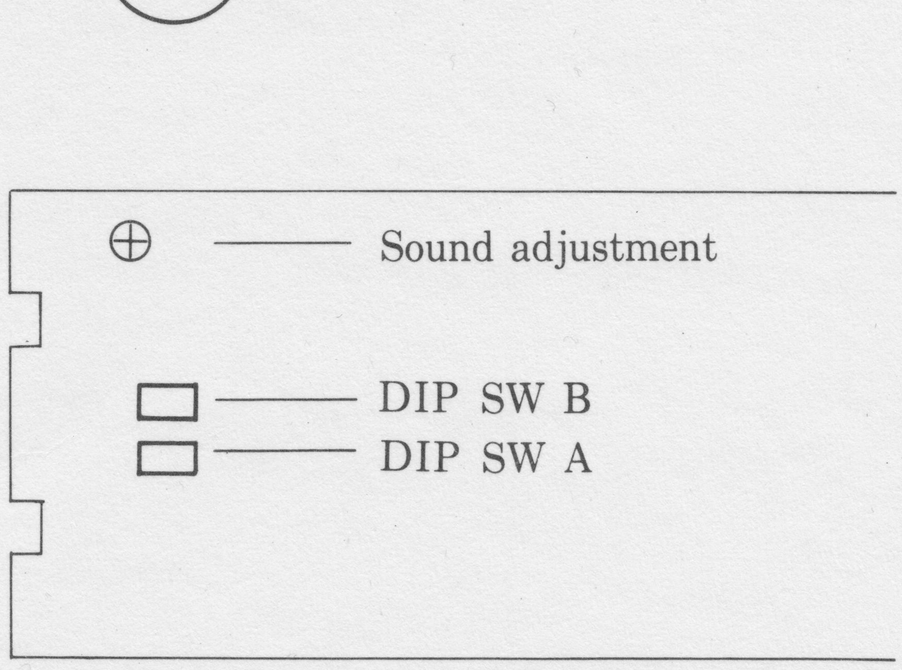

CONTROL PANEL

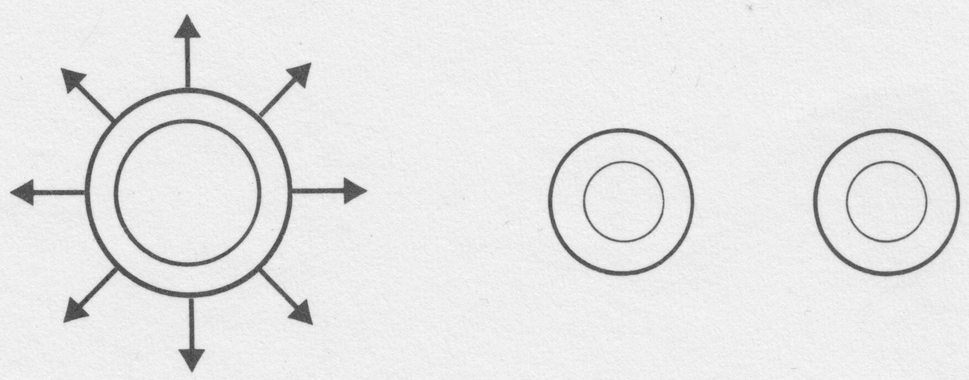

FLYING-TIGER DIP SW

* DIP SW A *

SETTING	POSITION	1	2	3	4	5	6	7	8
TEST MODE	* NORMAL GAME	OFF							
	TEST MODE	ON							
COIN TYPE	* TYPE 1		OFF						
	TYPE 2		ON						
DEMO SOUND	* SOUND			OFF					
	NO SOUND			ON					
SCREEN	* NORMAL				OFF				
	INVERSION				ON				
	TYPE 1	TYPE 2							
PLAY PRICING	* 1 COIN 1 PLAY	1 COIN 1 PLAY				OFF	OFF		
COIN 1	1 COIN 2 PLAY	2 COIN 1 PLAY				ON	OFF		
	2 COIN 1 PLAY	3 COIN 1 PLAY				OFF	ON		
	2 COIN 3 PLAY	4 COIN 1 PLAY				ON	ON		
COIN 2	* 1 COIN 1 PLAY	1 COIN 2 PLAY						OFF	OFF
	1 COIN 2 PLAY	1 COIN 3 PLAY						ON	OFF
	2 COIN 1 PLAY	1 COIN 4 PLAY						OFF	ON
	2 COIN 3 PLAY	1 COIN 6 PLAY						ON	ON

* DIP SW B *

SETTING	POSITION	1	2	3	4	5	6	7	8
NUMBER OF PLAYER	* 3	OFF	OFF						
	2	ON	OFF						
	4	OFF	ON						
	1	ON	ON						
GAME DIFFICULTY	* NORMAL			OFF	OFF				
	EASY			ON	OFF				
	HARD			OFF	ON				
	HARDEST			ON	ON				
						OFF	OFF		
						NO	OFF		
						OFF	ON		
						ON	ON		
AUTO SHOOTING	* YES							OFF	
	NO							ON	
CONTINUED PLAY	* WITH								OFF
	WITHOUT								ON

* SHOWS RECOMMENDED SETTINGS.

DOOYONG IND.CO.,LTD.

ADD:91-11, KARAK-DONG, SONGPA-GU,
SEOUL, KOREA
C.P.O. BOX 4493 SEOUL, KOREA
TEL :(02) 448-6831～5
FAX :(02) 406-8839